




## TECHNICAL DESCRIPTION ROCKWHEEL G5 TWIN

The Rockwheel G5 Twin Hydraulic Cutting Unit can be supplied with either Scaling/Grinding Cutting Drums or Rock Cutting Drums.

|                          |                    |                          |
|--------------------------|--------------------|--------------------------|
| Maximum Input Power      | 44 kW              | 59.0 hp                  |
| Maximum Flow             | 100.01 lpm         | 22.0 UK gpm              |
| Recommended Flow         | 80.0 lpm           | 17.6 UK gpm              |
| Maximum Pressure         | 400 bar            | 5,801 psi                |
| Output Shaft Torque      | 4,288 Nm @ 320 bar | 3,163 lbf ft @ 4,641 psi |
| Pick Force               | 24,9 kN @ 320 bar  | 5,598 lbf @ 4,641 psi    |
| Output Shaft Speed       | 95.0 rpm @ 80 lpm  | 95.0 rpm @ 17.6 UK gpm   |
| Pick Speed               | 1.7 m/s @ 80 lpm   | 5.58 ft/s @ 17.6 UK gpm  |
| Unit Weight              | 192.5 kg           | 423.5 lbs                |
| Excavator Range          | 5.0 – 10.0 tonne   | 5.0 – 10.0 tonne         |
| No of Picks (Rock Drums) | 32 (19.4 mm Shank) | 32 (0.76" Shank)         |

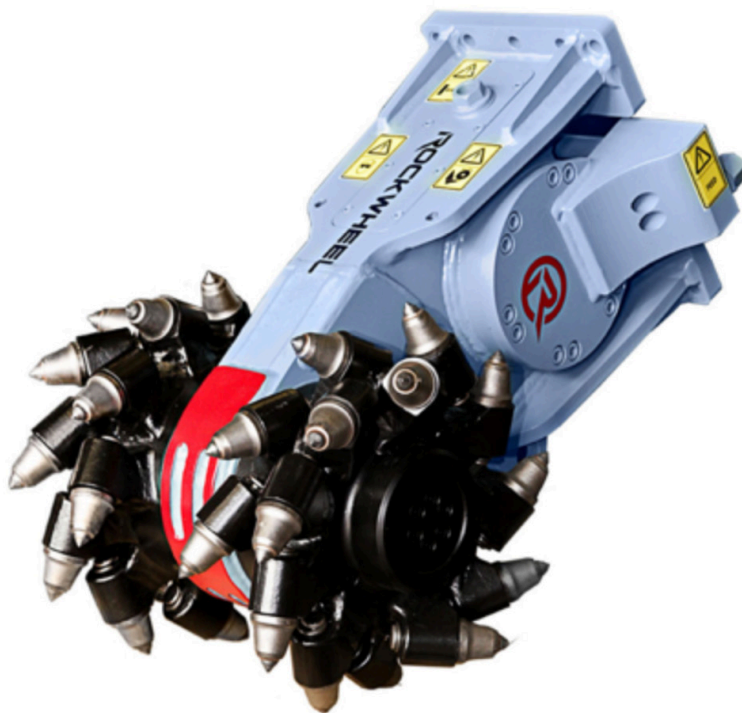

**WEBSTER**  
TECHNOLOGIES



## TECHNICAL DESCRIPTION ROCKWHEEL G5

To simplify installation the Rockwheel G5 mounting flange is designed to suit existing hydraulic breakers.

